

ELECTRICAL (Cont.)

ALTERNATOR

Application

Application	Bosch Part No.
1967-72	0 120 400 565, 0 120 400 615
1973	
95 & 96	0 120 400 656
Sonett	0 120 400 657

Other Data & Specifications — See Bosch Alternators in ELECTRICAL Section.

ALTERNATOR REGULATOR

Application

Application	Bosch Type No.	Bosch Part No.
1967-72	AD 1 14V	
1973		0 190 601 006


Other Data & Specifications — See Bosch Alternator Regulators in ELECTRICAL Section.

GENERAL SERVICING

CYLINDER HEAD TIGHTENING

Tighten cylinder head bolts in sequence shown in diagram to following specifications:

Application	Ft. Lbs. (mkg)
Step One	40 (5.5)
Step Two	50 (7.0)
Step Three	68 (9.5)

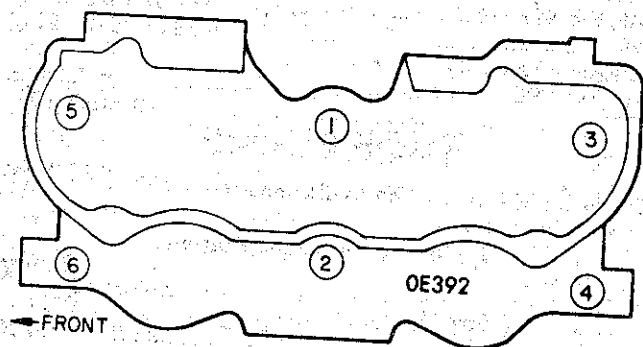


CYLINDER HEAD TIGHTENING SEQUENCE

INTAKE MANIFOLD TIGHTENING

Tighten intake manifold bolts and nuts in sequence shown in diagram to following specifications:

Application	Ft. Lbs. (mkg)
Step One	3-6 (.4-.8)
Step Two	15-18 (2.0-2.5)

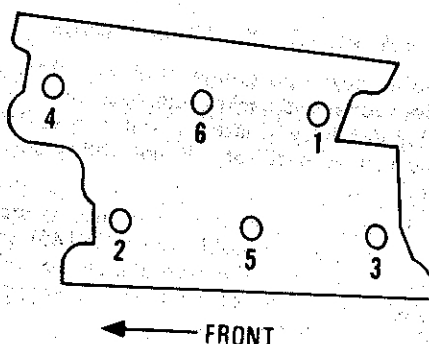

INTAKE MANIFOLD TIGHTENING SEQUENCE

BELT ADJUSTMENT

Adjust tension until it is possible to depress belt .28 in. (7 mm) with a pressure of 3.3 ft. lbs. (1.5 kp), mid-way between alternator and fan pulleys.

FILTERS & CLEANERS

Filters or Cleaners	Service Interval (Miles)
Oil Filter	Replace 6,000
Air Cleaner	① Clean 6,000
Fuel Filter	Clean 6,000

① — Replace at 18,000 miles.

CAPACITIES

Application	Quantity
Crankcase	① 3.5 qts.
Transmission & Differential	
95 & 96	1.4 qts.
Sonett	1.8 qts.
Cooling System	
1967-68	7.9 qts.
1969-73	7.5 qts.
Fuel Tank	
95	
1967-70	11.5 gals.
1971-73	11.0 gals.
96 & Monte Carlo	
1967-70	10.5 gals.
1971-73	10.0 gals.
Sonett	15.8 gals.

① — Includes filter change.